Mounting Instructions

HÄFELE Lighting


Item No.: 833.72.7XX


CONSTANT VOLTAGE LED DRIVERS


Item no.	Type key	Item no.	Type key
833.72.728	LD 24/020/1/4	833.72.746	LD 24/060/0/0
833.72.733	LD 24/020/0/0	833.72.747	LD 24/090/1/6
833.72.737	LD 24/040/1/4	833.72.748	LD 24/090/0/0
833.72.738	LD 24/040/0/0	833.72.749	LD 24/120/1/6
833.72.739	LD 24/060/1/6	833.75.752	LD 24/120/0/0

	V	W	mm/in	T_A
833.72.728	100-240 V 50/60 Hz	20 W	138 x 50 x 16 mm (5 7/16" x 2" x 5/8")	-25°C – +45°C -13°F – +113°F
833.72.733				
833.72.737		40 W	192 x 60 x 16 mm (7 1/2" x 2 3/8" x 5/8")	
833.72.738				
833.72.739		60 W	221 x 70 x 16 mm (8 3/4" x 2 3/4" x 5/8")	
833.72.746				
833.72.747		90 W	260 x 70 x 16 mm (10 1/4" x 2 3/4" x 5/8")	
833.72.748				
833.72.749		120 W	260 x 70 x 16 mm (10 1/4" x 2 3/4" x 5/8")	
833.72.752				

- 833.89.000 UK (250 V~)
- 833.89.001 AU (250 V~)
- 833.89.002 EU (250 V~)
- 833.89.003 US (120 V~)
- 833.89.016 JP (100 V~)
- 833.89.005 CN (250 V~)
- 833.89.006 KR (250 V~)
- 833.89.007 TW (110 V~)
- 833.89.009 EU (250 V~)
- 833.89.050 US (120 V~)

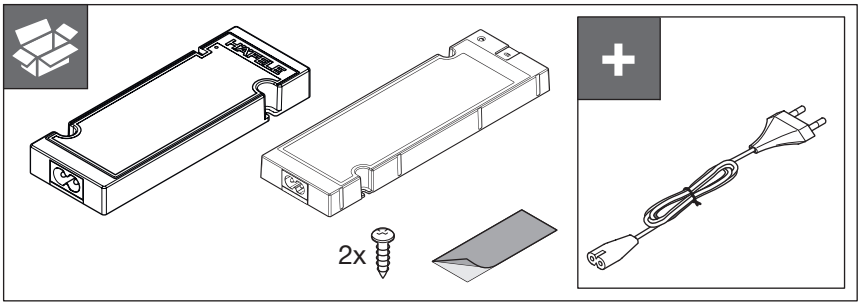




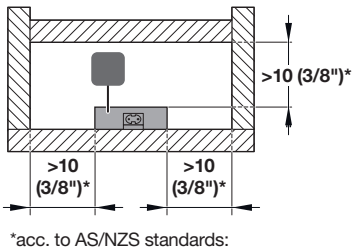


*acc. to AS/NZS standards: independent, DO NOT COVER!

W	A	B
20 W	42 (1 5/8")	91.5 (3 5/8")
40 W	50 (2")	145 (5 3/4")
60 W	60 (2 3/8")	174.5 (6 7/8")
90 W	60 (2 3/8")	213.5 (8 7/16")
120 W	60 (2 3/8")	213.5 (8 7/16")


Mounting hole dimensions



Tool required for mounting drivers




Screw mount




Adhesive mount


SELV

Driver distributor box to box connection

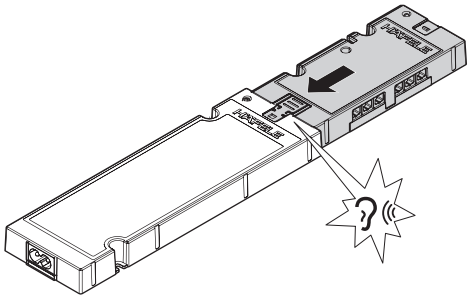


Tethered connection scheme

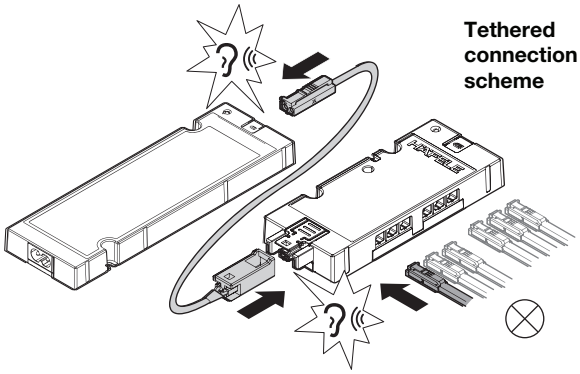

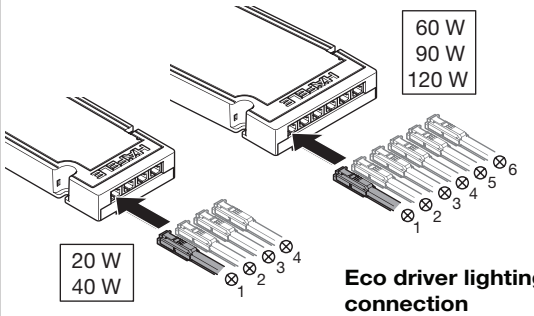



Eco driver lighting connection

Plug AC cord into driver



After the system has been connected, the AC power cord may be plugged into mains power.



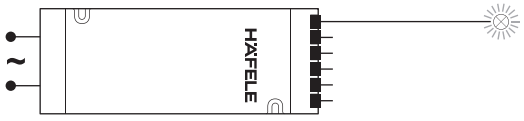

HÄFELE
3901 Cheyenne Drive | Archdale, NC 27263
1-800-423-3531 | **www.hafele.com**