
Häfele Loox5 LED 3071





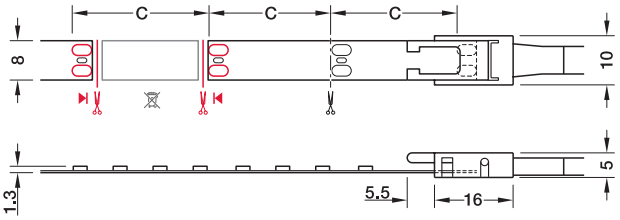

C = Section length

> Equipped with high-quality CREE LEDs

> Dimmable:	Yes
> Material:	Plastic
> Colour:	White
> Width:	8 mm
> Height:	1.3 mm
> Contact surface length:	4 mm
> Life time:	L80/B10 >30,000 h L70/B50 >50,000 h
> Degree of protection:	IP20
> Mounting:	Self-adhesive
> Supplied with:	1 roll

Order reference:
Please order lead, driver and switch separately

Aluminium profile recommended for appealing design, diffuse light distribution, mechanical protection and heat management

5 24 V Loox5 24 V driver must be ordered separately

Illuminance value in lx applies to 1 m strip length, without diffuser:

2700 K	3000 K	4000 K	5000 K	120°
960 lx	1040 lx	1180 lx	1270 lx	250 mm
415 lx	450 lx	510 lx	550 lx	500 mm
230 lx	250 lx	280 lx	300 lx	750 mm
160 lx	170 lx	195 lx	210 lx	1000 mm

IP20

Voltage	Number of LEDs	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI		Energy efficiency class	Section length C	Max. strip length (visual)	Available length	
V	LEDs/m	K	W/m	lm/m	lm/W	R_a	R_9		mm	m	5 m	50 m
5 24 V	**Häfele Loox5 LED 3071**											
	120	2700	4.8	430	90	92	>50	G	50	10	**833.76.605**	**833.76.705**
		3000	4.8	460	96	92	>50	F	50	10	**833.76.606**	**833.76.706**
		4000	4.8	485	101	92	>50	F	50	10	**833.76.607**	**833.76.707**
		5000	4.8	480	100	92	>50	F	50	10	**833.76.608**	**833.76.708**

Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Please note: A strip section with a new power supply that follows immediately is noticeably brighter
Maximum wattage-dependent strip length on the driver

DATA SHEET 2013, © Häfele U.K. Ltd 2013. Dimensional data not binding. We reserve the right to alter specifications without notice.